


## DIN fittings



### EVW-R Assembled adjustable standpipe elbow

EO 24° cone end / Male BSPP thread – metal sealing edge (ISO 1179)

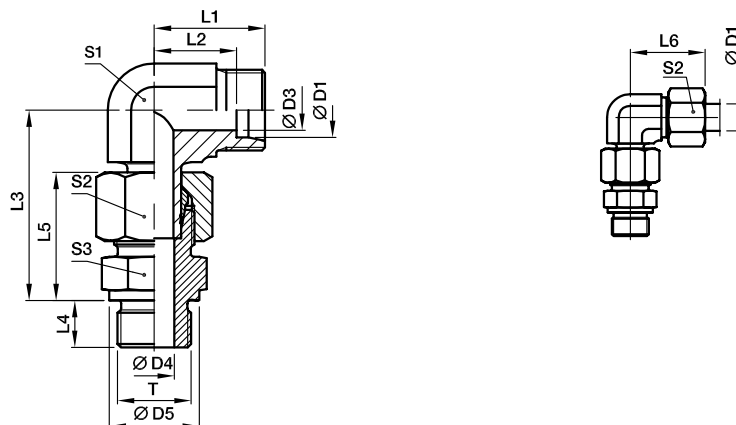

Pre-assembled, complete with straight male stud connector (with cutting face DIN 3852, type B). Final assembly (in appropriate body) at least 1/4 turn beyond the point of clearly perceptible resistance.

| Series          | D1 | T         | D3 | D4 | D5 | L1 | L2   | L3   | L4 | L5 | L6 | S1 | S2 | S3 | Weight<br>g/1 piece | Order code* | PN (bar) <sup>1)</sup> |     |
|-----------------|----|-----------|----|----|----|----|------|------|----|----|----|----|----|----|---------------------|-------------|------------------------|-----|
|                 |    |           |    |    |    |    |      |      |    |    |    |    |    |    |                     |             | CF                     | 71  |
| L <sup>3)</sup> | 06 | G 1/8 A   | 4  | 4  | 14 | 19 | 12.0 | 34.5 | 8  | 23 | 27 | 12 | 14 | 14 | 47                  | EVW06LROMD  | 315                    | 315 |
|                 | 08 | G 1/4 A   | 6  | 6  | 18 | 21 | 14.0 | 37.5 | 12 | 25 | 29 | 12 | 17 | 19 | 68                  | EVW08LROMD  | 315                    | 315 |
|                 | 10 | G 1/4 A   | 8  | 6  | 18 | 22 | 15.0 | 40.0 | 12 | 26 | 30 | 14 | 19 | 19 | 84                  | EVW10LROMD  | 315                    | 315 |
|                 | 12 | G 3/8 A   | 10 | 9  | 22 | 24 | 17.0 | 42.0 | 12 | 27 | 32 | 17 | 22 | 22 | 118                 | EVW12LROMD  | 315                    | 315 |
|                 | 15 | G 1/2 A   | 12 | 11 | 26 | 28 | 21.0 | 46.5 | 14 | 29 | 36 | 19 | 27 | 27 | 191                 | EVW15LROMD  | 250                    | 250 |
|                 | 18 | G 1/2 A   | 15 | 14 | 26 | 31 | 23.5 | 50.0 | 14 | 31 | 40 | 24 | 32 | 27 | 260                 | EVW18LROMD  | 250                    | 250 |
|                 | 22 | G 3/4 A   | 19 | 18 | 32 | 35 | 27.5 | 55.0 | 16 | 33 | 44 | 27 | 36 | 32 | 355                 | EVW22LROMD  | 160                    | 160 |
|                 | 28 | G 1 A     | 24 | 23 | 39 | 38 | 30.5 | 59.5 | 18 | 34 | 47 | 36 | 41 | 41 | 542                 | EVW28LROMD  | 160                    | 160 |
|                 | 35 | G 1 1/4 A | 30 | 30 | 49 | 45 | 34.5 | 68.5 | 20 | 39 | 56 | 41 | 50 | 50 | 832                 | EVW35LROMD  | 160                    | 160 |
|                 | 42 | G 1 1/2 A | 36 | 36 | 55 | 51 | 40.0 | 79.0 | 22 | 42 | 63 | 50 | 60 | 55 | 1303                | EVW42LROMD  | 160                    | 160 |
| S <sup>4)</sup> | 06 | G 1/4 A   | 4  | 4  | 18 | 23 | 16.0 | 40.0 | 12 | 28 | 31 | 12 | 17 | 19 | 79                  | EVW06SROMD  | 400                    | 400 |
|                 | 08 | G 1/4 A   | 5  | 5  | 18 | 24 | 17.0 | 42.5 | 12 | 30 | 32 | 14 | 19 | 19 | 98                  | EVW08SROMD  | 400                    | 400 |
|                 | 10 | G 3/8 A   | 7  | 7  | 22 | 25 | 17.5 | 46.0 | 12 | 31 | 34 | 17 | 22 | 22 | 148                 | EVW10SROMD  | 400                    | 400 |
|                 | 12 | G 3/8 A   | 8  | 8  | 22 | 29 | 21.5 | 48.0 | 12 | 33 | 38 | 17 | 24 | 22 | 169                 | EVW12SROMD  | 400                    | 400 |
|                 | 14 | G 1/2 A   | 10 | 10 | 26 | 30 | 22.0 | 54.0 | 14 | 37 | 40 | 19 | 27 | 27 | 230                 | EVW14SROMD  | 400                    | 400 |
|                 | 16 | G 1/2 A   | 12 | 12 | 26 | 33 | 24.5 | 56.0 | 14 | 37 | 43 | 24 | 30 | 27 | 304                 | EVW16SROMD  | 400                    | 400 |
|                 | 20 | G 3/4 A   | 16 | 16 | 32 | 37 | 26.5 | 65.0 | 16 | 42 | 48 | 27 | 36 | 32 | 428                 | EVW20SROMD  | 400                    | 400 |
|                 | 25 | G 1 A     | 20 | 20 | 39 | 42 | 30.0 | 73.0 | 18 | 47 | 54 | 36 | 46 | 41 | 825                 | EVW25SROMD  | 250                    | 250 |
|                 | 30 | G 1 1/4 A | 25 | 25 | 49 | 49 | 35.5 | 78.5 | 20 | 50 | 62 | 41 | 50 | 50 | 1134                | EVW30SROMD  | 160                    | 160 |
|                 | 38 | G 1 1/2 A | 32 | 32 | 55 | 57 | 41.0 | 92.5 | 22 | 57 | 72 | 50 | 60 | 55 | 1713                | EVW38SROMD  | 160                    | 160 |

<sup>1)</sup> Pressure shown = item deliverable

<sup>3)</sup> L = light series; <sup>4)</sup> S = heavy series

PN (bar) = PN (MPa)  
10

Delivery without nut and ring. Information on ordering complete fittings see page 17.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes             |                             |              |
|---------------------------------|-----------------------------|--------------|
| Material                        | Suffix surface and material | Example      |
| Steel, zinc plated, Cr(VI)-free | CF                          | EVW16SROMDCF |
| Stainless Steel                 | 71                          | EVW16SROMD71 |